



# MARK - 12


## Sealed Beam Rotating Beacon

### Features

- Large 12" rotating light
- Quiet belt drive, for simplified maintenance
- Anodized aluminum base prevents corrosion
- Five polycarbonate dome colors
- Optional model with independent light and motor power
- 115 VAC, 220VAC, 12VDC models

### Typical Applications

- Entertainment lighting
- Industrial alerts
- Machine status indicator
- Architectural warnings
- Weather alerts

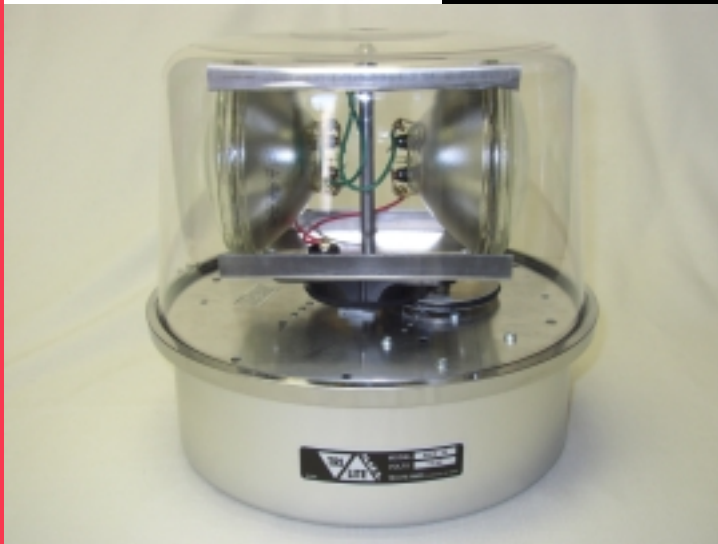

### Description

Tri Lite Inc.'s Mark 12 beacon is a large, high powered sealed beam warning light, featuring two PAR 46 aircraft style beams. The bulbs rotate on a quiet and smooth belt and pulley system under a tough polycarbonate dome. The light is mounted on an anodized aluminum base to seal out the elements and prevent corrosion.

This versatile light is perfect for lighting effects, indication of machine status or providing a warning. The Mark 12 is available in a variety of dome colors and in 115VAC, 220VAC and 12VDC models. The new Split model allows the user to independently power and control the lights and motor of the Mark 12 creating unique and custom lighting effects.

### Specifications

#### Electrical Specifications


AC Voltage .....	115 V
AC Current .....	0.6 A
DC Voltage .....	12 V
DC Current .....	4.54 A
Estimated Lamp Life .....	100 hours
Lamp Brightness .....	75,000 cp

#### Physical Specifications

Height .....	12"
Diameter .....	12"
Flashes per Minute .....	85-95
Shipping Weight .....	12 lbs
Shipping Volume .....	1.57 ft <sup>3</sup>



# MARK - 12

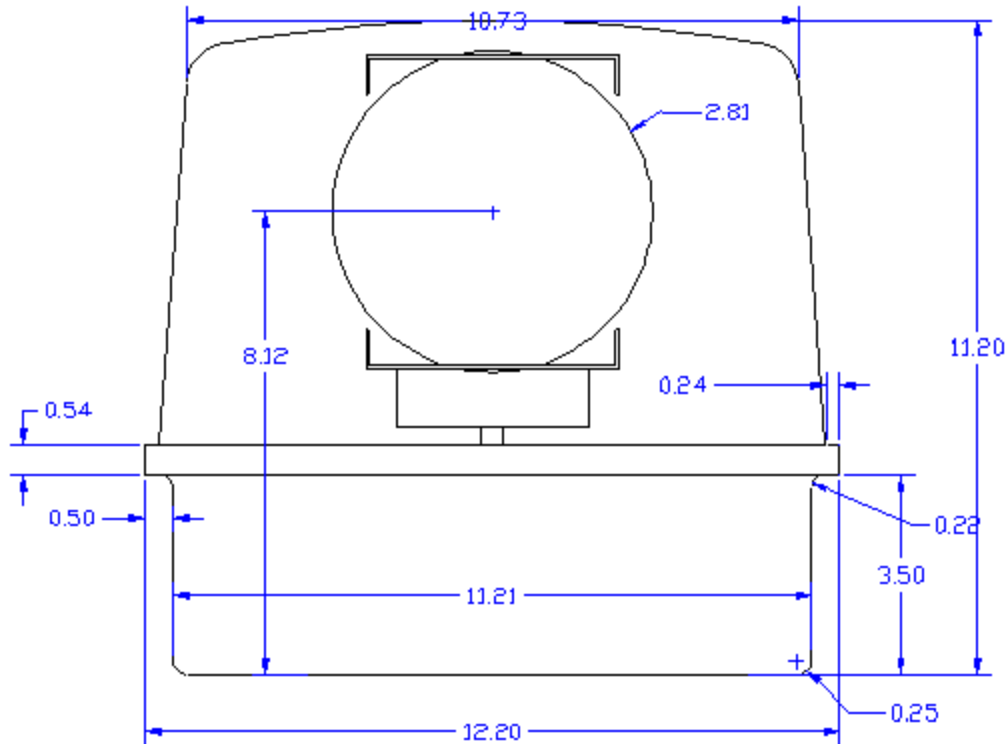

## Model Number Information

Variant	Product Number
110V Permanent Mount .....	MARK12-110P/*
220V Permanent Mount .....	MARK12-220P/*
12V DC Permanent Mount .....	MARK12-12P/*
110V Split Power .....	MARK12S-110P/*

\* Specify Dome Color

A-Amber B-Blue C-Clear G-Green R-Red

## Replacement Part Information

Part	Part Number
Amber Dome .....	200536
Blue Dome .....	200534
Clear Dome .....	200533
Green Dome .....	200537
Red Dome .....	200535
PAR 46 Sealed Beam Light .....	420418
Replacement Motor .....	553230
115V to 12V Transformer .....	623001
115V to 12V Split Motor Transformer .....	623010

## Information is available for these additional Tri Lite/Mars products

